



# DV 808C-1890-30

## Rectifier Diode

### Properties

- Industry standard housing
- Suitable for parallel operation
- High operating temperature
- Low forward voltage drop

### Key Parameters

$V_{RRM}$	=	3 000	V
$I_{FAVm}$	=	1 926	A
$I_{FSM}$	=	26 000	A
$V_{TO}$	=	0.972	V
$r_T$	=	0.149	mΩ

### Types

	$V_{RRM}$
<b>DV 808C-1890-30</b>	<b>3 000 V</b>
Conditions:	$T_j = -40 \div 150 \text{ }^\circ\text{C}$ , half sine waveform, $f = 50 \text{ Hz}$

### Mechanical Data

$F_m$	Mounting force	<b>25 ± 5 kN</b>
$m$	Weight	<b>0.44 kg</b>
$D_s$	Surface creepage distance	<b>22 mm</b>
$D_a$	Air strike distance	<b>13.9 mm</b>

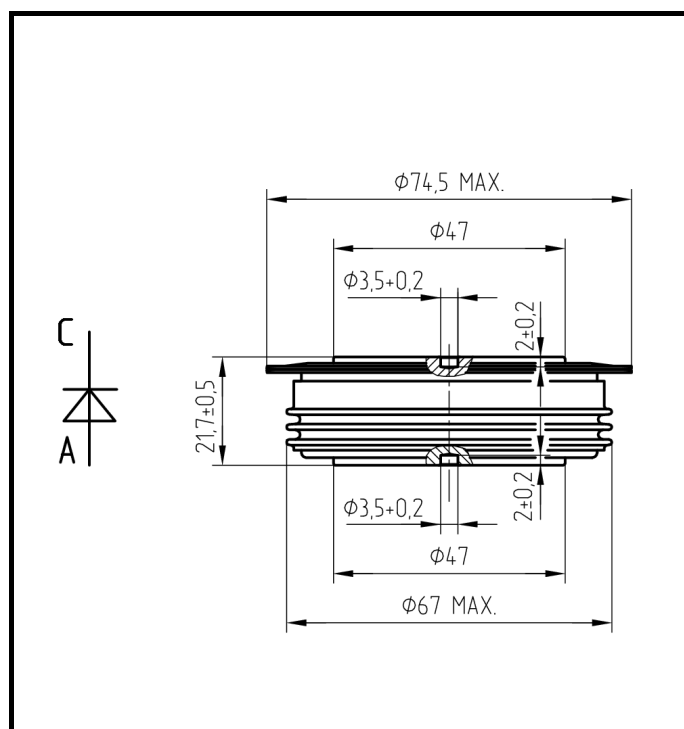


Fig. 1 Case

## Polovodice, a.s.

Novodvorska 1768/138a, 142 21 Praha 4, Czech Republic

tel.: +420 261 306 265, fax: +420 261 306 307, <http://www.polovodice.cz>

<b>Maximum Ratings</b>			<b>Maximum Limits</b>	<b>Unit</b>
$V_{RRM}$	<b>Repetitive peak reverse voltage</b> $T_j = -40 \div 150 \text{ }^\circ\text{C}$	<b>DV 808C-1890-30</b>	<b>3 000</b>	<b>V</b>
$I_{FAVm}$	<b>Average forward current</b> $T_c = 85 \text{ }^\circ\text{C}$		<b>1 926</b>	<b>A</b>
$I_{FRMS}$	<b>RMS forward current</b> $T_c = 85 \text{ }^\circ\text{C}$		<b>3 025</b>	<b>A</b>
$I_{RRM}$	<b>Repetitive reverse current</b> $V_R = V_{RRM}$		<b>40</b>	<b>mA</b>
$I_{FSM}$	<b>Peak non-repetitive surge</b> <i>half sine pulse, <math>V_R = 0 \text{ V}</math></i>	$t_p = 10 \text{ ms}$	<b>26 000</b>	<b>A</b>
		$t_p = 8.3 \text{ ms}$	<b>27 800</b>	
$I_{FSM}$	<b>Peak non-repetitive surge</b> <i>half sine pulse, <math>V_R = 0.7 V_{RRM}</math></i>	$t_p = 10 \text{ ms}$	<b>20 800</b>	<b>A</b>
		$t_p = 8.3 \text{ ms}$	<b>22 200</b>	
$\int I^2 t$	<b>Limiting load integral</b> <i>half sine pulse, <math>V_R = 0 \text{ V}</math></i>	$t_p = 10 \text{ ms}$	<b>3 338 000</b>	<b>A<sup>2</sup>s</b>
		$t_p = 8.3 \text{ ms}$	<b>3 210 000</b>	
$\int I^2 t$	<b>Limiting load integral</b> <i>half sine pulse, <math>V_R = 0.7 V_{RRM}</math></i>	$t_p = 10 \text{ ms}$	<b>2 163 000</b>	<b>A<sup>2</sup>s</b>
		$t_p = 8.3 \text{ ms}$	<b>2 045 000</b>	
$T_{jmin} - T_{jmax}$	<b>Operating temperature range</b>		<b>-40 <math>\div</math> 150</b>	<b><math>^\circ\text{C}</math></b>
$T_{STG}$	<b>Storage temperature range</b>		<b>-40 <math>\div</math> 175</b>	<b><math>^\circ\text{C}</math></b>

Unless otherwise specified  $T_j = 150 \text{ }^\circ\text{C}$


<b>Characteristics</b>		<b>Value</b>			<b>Unit</b>
		<b>min</b>	<b>typ</b>	<b>max</b>	
$V_{T0}$	<b>Threshold voltage</b>			<b>0.972</b>	<b>V</b>
$r_T$	<b>Forward slope resistance</b> $I_{F1} = 2\,969 \text{ A}, I_{F2} = 8\,906 \text{ A}$			<b>0.149</b>	<b>m<math>\Omega</math></b>
$V_{FM}$	<b>Maximum forward voltage</b> $I_{FM} = 5\,000 \text{ A}, T_j = 25 \text{ }^\circ\text{C}$			<b>1.575</b>	<b>V</b>
$Q_{rr}$	<b>Recovered charge</b> $V_R = 100 \text{ V}, I_{FM} = 1\,000 \text{ A}, di/dt = -30 \text{ A}/\mu\text{s}$		<b>3 800</b>		<b><math>\mu\text{C}</math></b>

Unless otherwise specified  $T_j = 150 \text{ }^\circ\text{C}$

Polovodice, a.s., Novodvorska 1768/138a, 142 21 Praha 4, Czech Republic

Polovodice, a.s. reserves the right to change the data contained herein at any time without notice

Thermal Parameters			Value	Unit
$R_{thjc}$	Thermal resistance junction to case	double side cooling	18.5	K/kW
		anode side cooling	33	
		cathode side cooling	42	
$R_{thch}$	Thermal resistance case to heatsink	double side cooling	4	K/kW
		single side cooling	8	

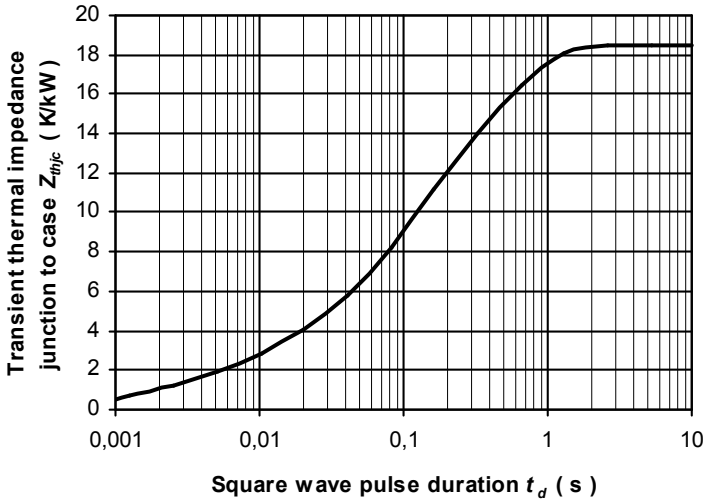Transient Thermal Impedance														
<b>Analytical function for transient thermal impedance</b>  <div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 10px auto;"> <math display="block">Z_{thjc} = \sum_{i=1}^5 R_i (1 - \exp(-t/\tau_i))</math> </div> <p>Conditions:  <math>F_m = 25 \pm 5</math> kN, Double side cooled</p> <p><b>Correction for periodic waveforms</b></p> <table border="1" style="width: 100%;"> <tr> <td>180° sine:</td> <td>1.6 K/kW</td> </tr> <tr> <td>180° rectangular:</td> <td>2.2 K/kW</td> </tr> <tr> <td>120° rectangular:</td> <td>3.6 K/kW</td> </tr> <tr> <td>60° rectangular:</td> <td>5.9 K/kW</td> </tr> </table>	180° sine:	1.6 K/kW	180° rectangular:	2.2 K/kW	120° rectangular:	3.6 K/kW	60° rectangular:	5.9 K/kW	$i$	1	2	3	4	5
	180° sine:	1.6 K/kW												
	180° rectangular:	2.2 K/kW												
120° rectangular:	3.6 K/kW													
60° rectangular:	5.9 K/kW													
$\tau_i$ (s)	0.4293	0.0940	0.0413	0.0042	0.0005									
$R_i$ (K/kW)	9.22	5.65	1.79	1.76	0.06									
														
<p>Fig. 2 Dependence transient thermal impedance junction to case on square pulse</p>														

Polovodice, a.s., Novodvorska 1768/138a, 142 21 Praha 4, Czech Republic

**Maximum forward voltage drop characteristics**

Analytical function for maximum forward drop characteristics

$$V_F = A + B \cdot I_F + C \cdot \sqrt{I_F} + D \cdot \ln(I_F + 1)$$

Conditions:

$F_m = 25 \pm 5$  kHz, halfsine pulse 8.3 ÷ 10 ms

$T_j$ (°C)	A	B
25	5.0351 E-1	1.1473 E-4
150	7.5931 E-2	1.6382 E-4

$T_j$ (°C)	C	D
25	-4.1929 E-3	9.3316 E-2
150	-6.3547 E-3	1.4976 E-1

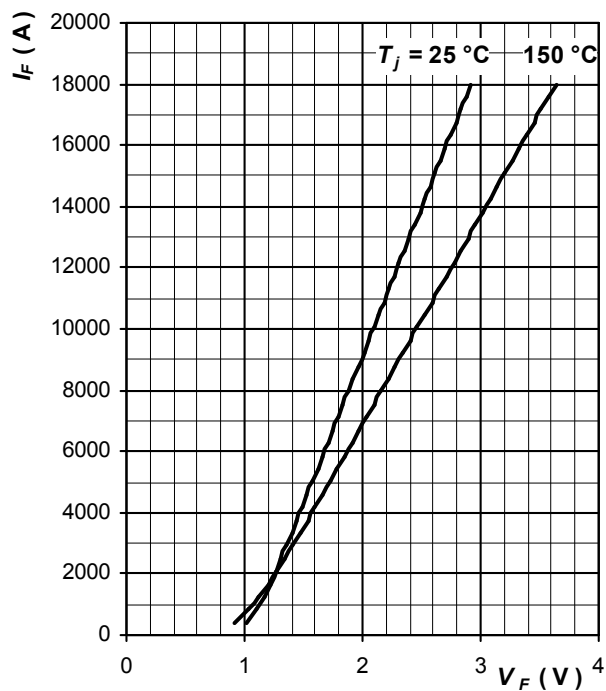


Fig. 3 Maximum forward voltage drop characteristics

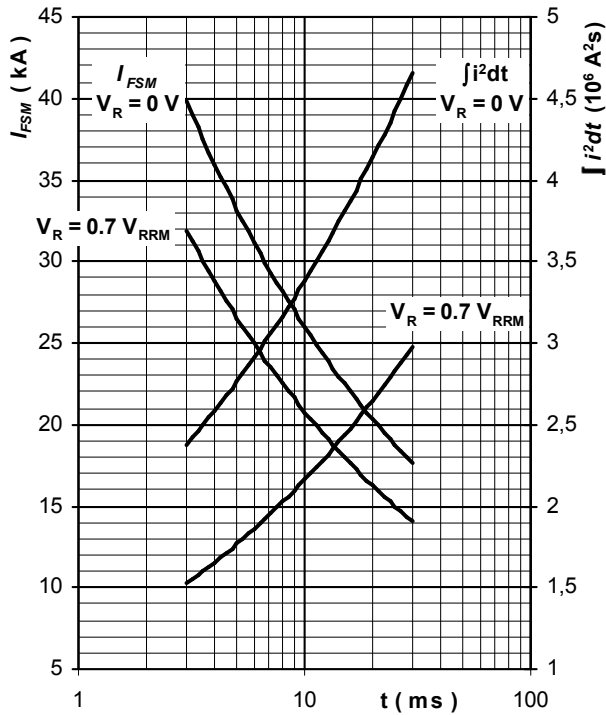


Fig. 4 Surge forward current vs. pulse length, half sine wave, single pulse,  $T_j = T_{jmax}$

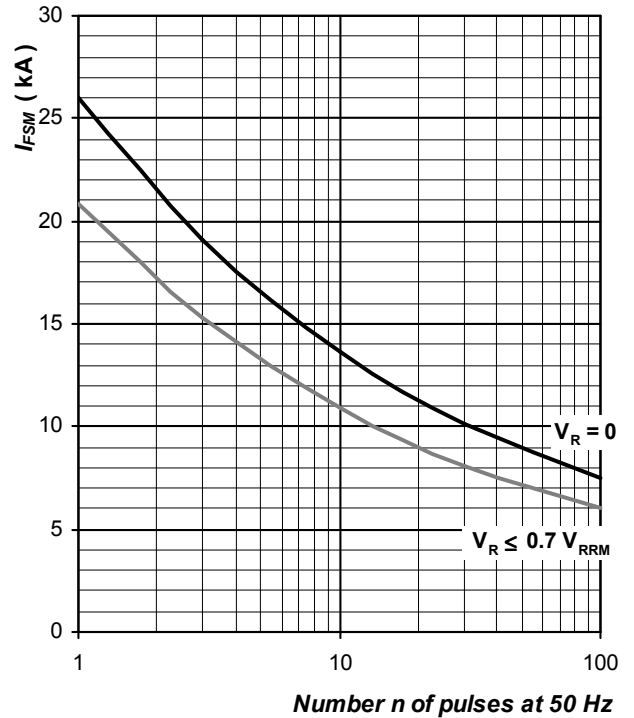


Fig. 5 Surge forward current vs. number of pulses, half sine wave,  $T_j = T_{jmax}$

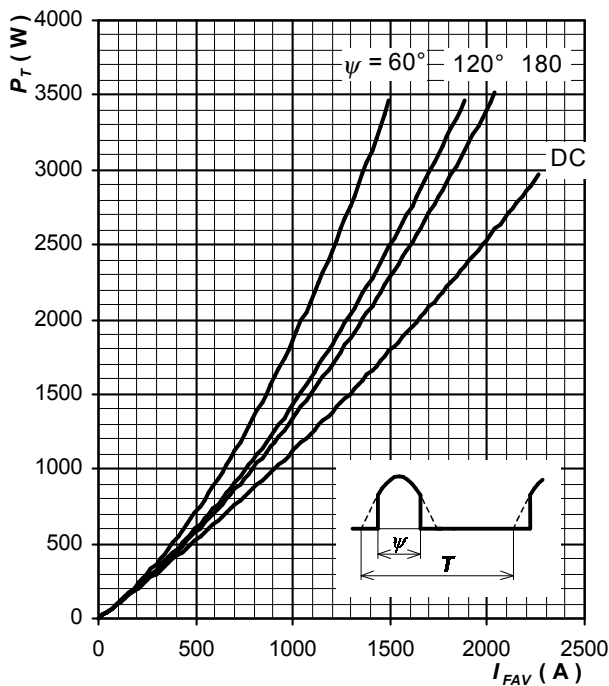


Fig. 6 Forward power loss vs. average forward current, sine waveform,  $f = 50 \text{ Hz}$ ,  $T = 1/f$

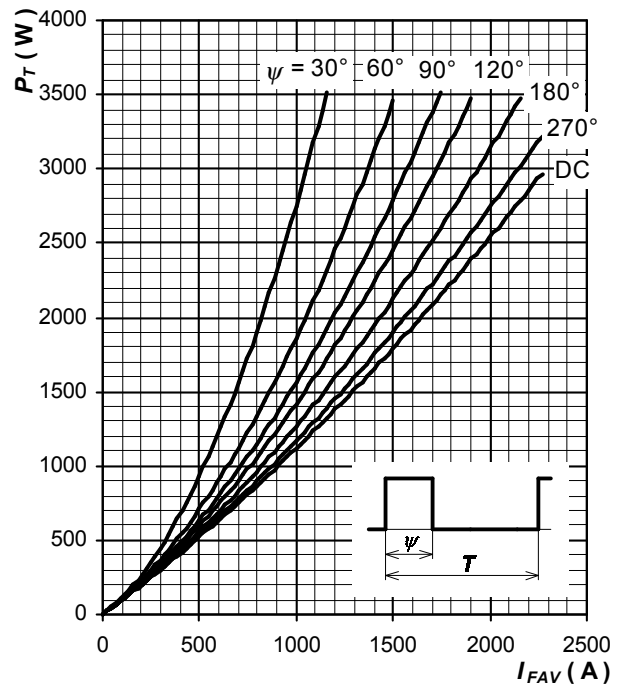


Fig. 7 Forward power loss vs. average forward current, square waveform,  $f = 50 \text{ Hz}$ ,  $T = 1/f$

Polovodice, a.s., Novodvorska 1768/138a, 142 21 Praha 4, Czech Republic

Polovodice, a.s. reserves the right to change the data contained herein at any time without notice

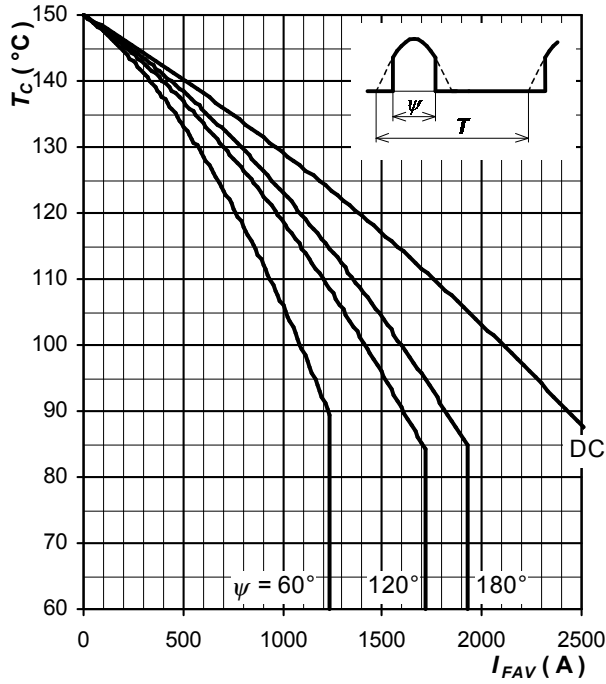


Fig. 8 Max. case temperature vs. aver. forward current, sine waveform,  $f = 50$  Hz,  $T = 1/f$

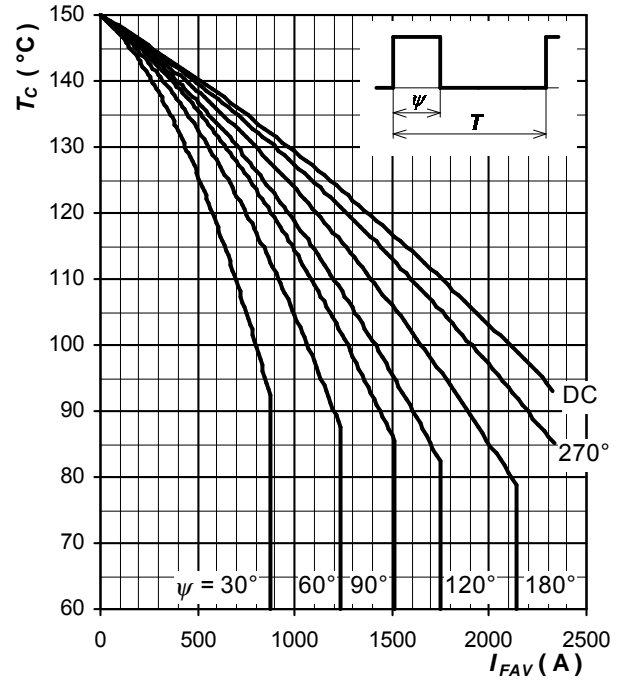


Fig. 9 Max. case temperature vs. aver. forward current, square waveform,  $f = 50$  Hz,  $T = 1/f$

Notes